

# Burst Plugs

Reliable, Secure  
Pressure-Relief System



## Features

- Welded one piece assembly - no degradation of joint strength at elevated temperatures
- Inconel rupture disk – stable through a wide range of temperatures
- Burst pressure ranges from 1,000 to 15,000psi
- Accuracy of  $\pm 10\%$  of rated burst pressure at 300° – 750°F
- Leak rate exceeds  $1 \times 10^{-6}$  standard cc/sec

## Description

The Model BP420 burst plugs are designed specifically for use in plastic extrusion systems. Burst Plugs (also known as rupture disks) are designed for reliable, emergency relief of excess pressure in a system. The Model BP420 will instantaneously rupture at a specific, predetermined pressure and temperature. Each one piece assembly consists of a 304 stainless steel body with a welded Inconel rupture disk. The disk is flush with the tip of the burst plug with no cavity for product build up. A burst plug may be specified for primary relief in applications where pressure build-up can occur so rapidly that the response time of a relief valve is inadequate, such as in a polymerization reaction vessel.

All burst plugs are tested at rated burst pressure and temperature. In addition, markings on the burst plugs are laser engraved and more visible, and each burst plug is labeled and shipped in a protective package.

**Dynisco**38 Forge Parkway  
Franklin, MA 02038  
USA

Hotline 1-800-Dynisco

[www.dynisco.com](http://www.dynisco.com)

Phone +1 508 541 9400

Fax +1-508 541 6206

Email [infoinst@dynisco.com](mailto:infoinst@dynisco.com)**Dynisco Europe, GmbH**Pfaffenstr. 21  
74078 Heilbronn  
Germany

Phone +49 7131 297 0

Fax +49 7131 297 166

Email [dyniscoeurope@dynisco.com](mailto:dyniscoeurope@dynisco.com)**Dynisco Shanghai**BBldg. 2, No. 800, Shenfu Rd.,  
Minghang District  
Shanghai, 201108, China

Phone

+86-21-34074072-819

Fax

+86 21 34074025

Email

[infoinst@dynisco.com](mailto:infoinst@dynisco.com)

## Specifications

### MECHANICAL & PACKAGING CHARACTERISTICS

#### Material of Construction:

**Body:** 304 stainless steel  
**Rupture Disk:** Inconel

**Accuracy:** Accuracy of  $\pm 10\%$  of rated burst pressure at 300° – 750°F

### APPROVALS AND CERTIFICATIONS

**ISO:** ISO 4126-2:2003(E)


**CE:** PED 97/23/EC, modules B&D

**Burst Certification:** Each unit is test burst certified

**Mounting Torque:** Not to exceed 300 in/lbs.

## Ordering Guide

BP420-XXX-XX-XX-XXXX

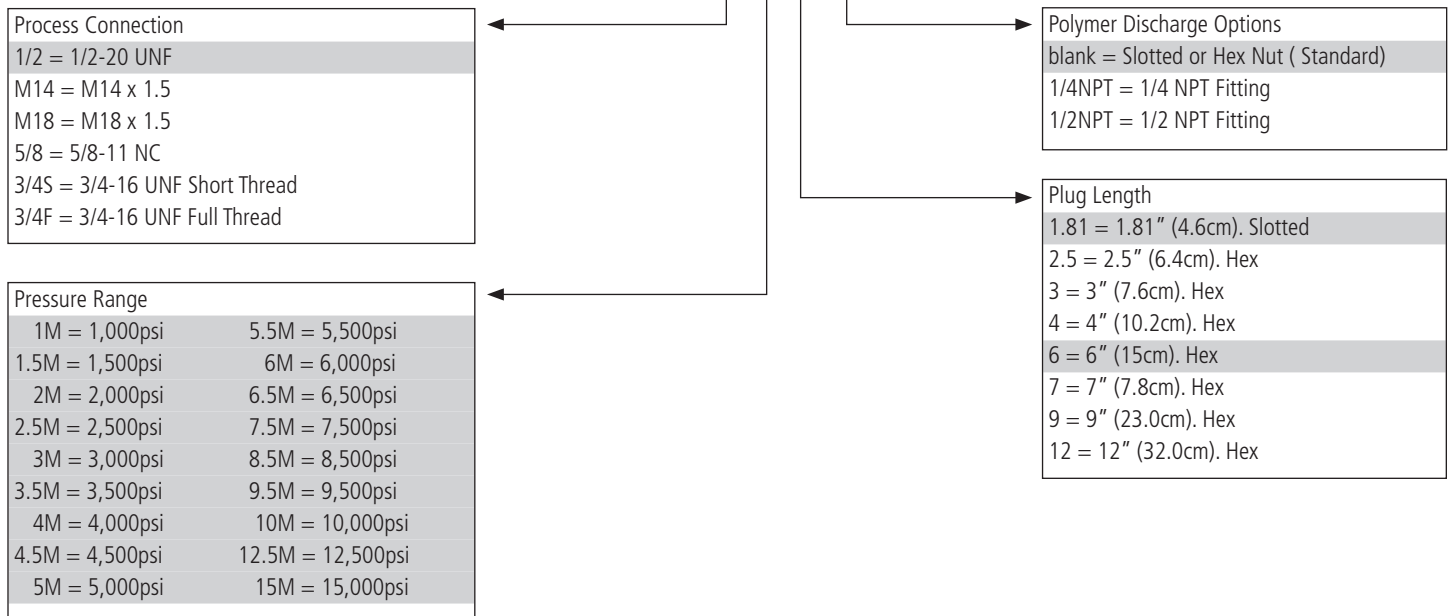

Shaded sections refer to standard (short lead time) configurations. Contact the factory for other configurations that may be available.

