



Visionary-T

3D SNAPSHOT – WIDE RANGE OF APPLICATIONS FOR INDOOR USE

3D vision

SENSORS
INCORPORATED

SICK
Sensor Intelligence.

FULL FLEXIBILITY FOR INDOOR USE

The streaming cameras in the Visionary-T 3D vision product family deliver high-quality data for industrial applications. Both the hardware and the software have been designed specifically for indoor use in industrial environments. The cameras can be used 24/7. They have an IP67 enclosure rating and a reliable software interface.

Features

Supporting a wide range of applications, reliable as part of a system, customized for each specific application – these are the features that characterize Visionary-T cameras. Additional features such as thermal management for high functionality, a special concept for optimum illumination, and camera coexistence modes for the simultaneous operation of multiple cameras contribute to the reliability of the cameras.


Your benefits

Thermal management allows the Visionary-T cameras to be used in a defined temperature range without impairing heat dissipation or data quality and without any external cooling components. Visionary-T data is perfectly calibrated for the prevailing temperature range. The illumination concept ensures uniform light distribution over the whole field of view. As a result, the cameras can be relied upon to capture data even at the edges of images. Various camera coexistence modes enable multiple cameras to be operated simultaneously. They prevent mutual interference caused by the light sources of the cameras during operation, for example. They allow multiple cameras to operate in a dynamic environment. This is useful, for example, in intralogistics or quality control applications. These and many more features make the cameras in the Visionary-T product family intelligent solutions for any industrial application.



Visionary-T CX

The Visionary-T CX is a 3D streaming camera. It is suitable for users who want to develop applications for their specific requirements. The camera offers full flexibility in terms of the provided distance, intensity and confidence values on an external evaluation unit (a PC, for example).



Polar data reduction: Projection of more than 25,000 distance points onto a single line which can be represented by just a small number of points.

Visionary-T AG

The smart Visionary-T AG streams either the complete 3D data, as the Visionary-T CX does, or reduced data which has already been preprocessed to meet specific application needs. One feature, for example, allows the user to effectively represent 3D information in 2D. The camera does this by projecting data from more than 25,000 distance points onto a curve which is represented by just a small number of points (polar data reduction). Another way to reduce the data is to choose a specific measurement volume and output the data in suitable Cartesian coordinates. In addition, a variety of filter options improve the performance of the Visionary-T AG still further. All of these properties enable the Visionary-T AG to be used in a wide range of applications including intralogistics, robotics, or quality control.




Cartesian data reduction: Selection of the required measurement volume and output of data in Cartesian coordinates (X-Y-Z).

3D DATA IN REAL TIME

The Visionary-T product family operates according to the 3D time-of-flight measurement principle. To capture an image, the time-of-flight of a light signal between the camera and the sensor is measured for each pixel. The distance between the camera and the object can be calculated by detecting the time-of-flight through phase shift between the emitted light signal and the reflected light signal. Different phase shifts, therefore, equate to different distances. Accordingly, thousands of pixels captured in a single shot deliver a detailed three-dimensional distance image – a 3D snapshot – of the image area.


Phase shift

Modulated light is emitted and then captured by the camera after the reflection from the object. The distance is calculated by detecting the phase shift.

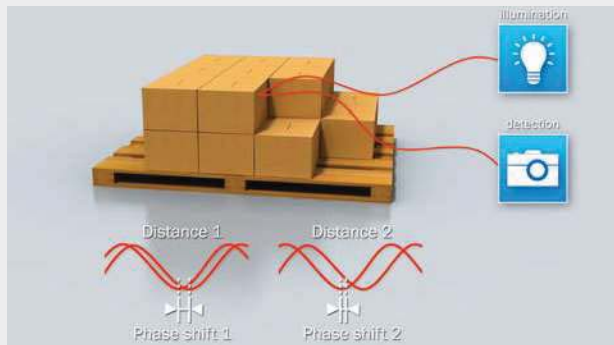


3D time-of-flight

The Visionary-T uses 3D time-of-flight technology to capture more than 25,000 pixels in a 3D snapshot.

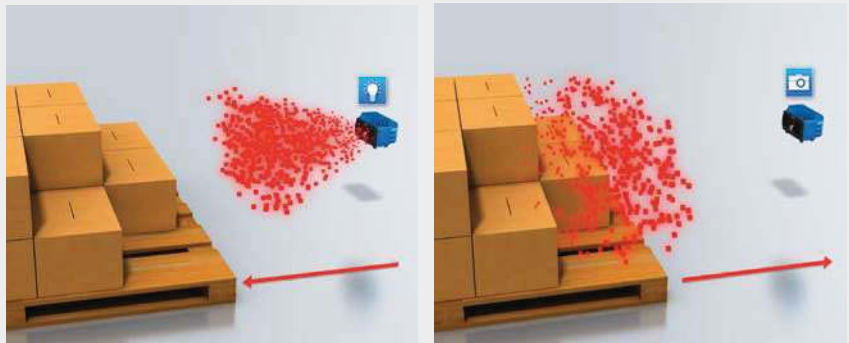

A resulting distance image

The camera uses the 3D time-of-flight data to calculate a distance image. Similar to conventional 2D cameras, the same 3D snapshot also contains intensity values.

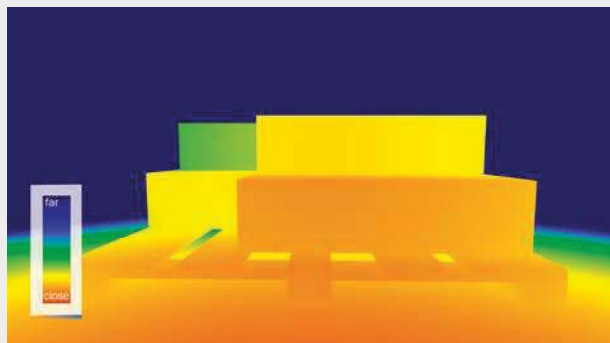

VERSATILE AREAS OF APPLICATION


Visionary-T cameras are used in numerous processes in automation networks in both factory automation and logistics automation. With their powerful visualization tools and reliable 3D information, Visionary-T cameras are an effective solution wherever spatial detection can assist with quality control, process optimization, and functional safety.

Collision awareness




Detection of objects on and above ground, such as the manned forklift trucks or cranes shown here.

Object detection

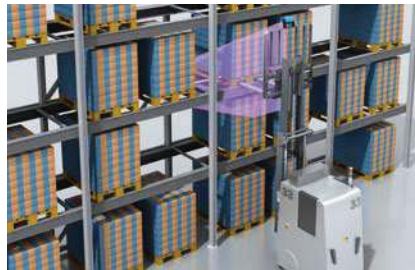


Precise position detection of a pallet for loading or unloading tasks in a high-bay warehouse.

Palletizing and depalletizing

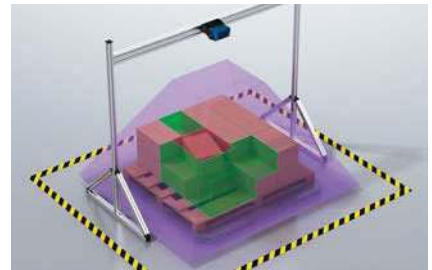


Detection of available and occupied areas to control and optimize palletizing solutions.


Automated bag drop

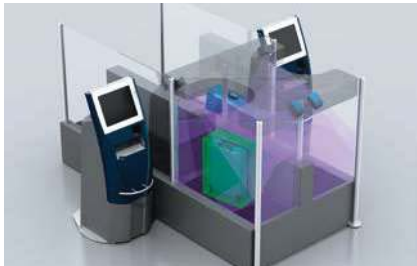

Detection of the volume of bags at automatic bag drop counters. In the image on the right, the permissible dimensions have been exceeded because the handle of the case has not been pushed down.

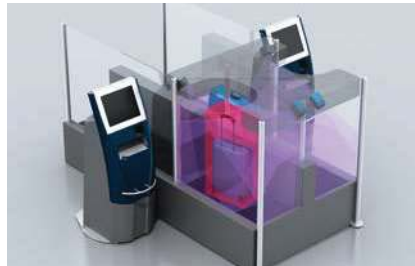


Robotics – Building automation

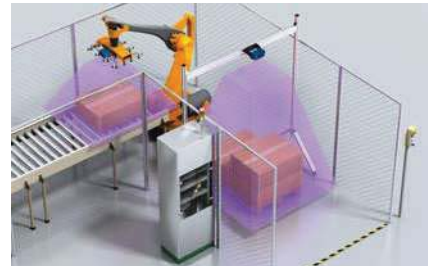


Detection of single boxes and free space for automated pick-and-place applications.


Quality check – Factory automation

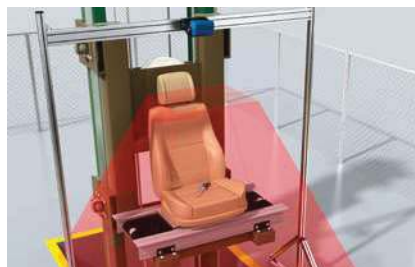


Detection of undesirable deviations by comparing an image against a predefined model to recognize improper conditions. In the image on the right, there is a screwdriver on the seat.

3D SNAPSHOT – FOR VERSATILE USE INDOORS







Additional information

Detailed technical data7

Ordering information8

Dimensional drawings9

Accessories.....10

Product description

Visionary-T 3D vision sensors from SICK offer maximum flexibility for indoor use. The innovative 3D-snapshot time-of-flight technology provides the Visionary-T with real-time depth information for each pixel, even for stationary applications. The output can be either pure 3D

raw data, or reduced data that suits the respective application. The high-performance visualization tool and reliable 3D data output make the Visionary-T the ideal solution in diverse applications within intralogistics, robotics, or industrial vehicles.

At a glance

- Record up to 30 3D images per second
- Distance values: 144 x 176 pixels per snapshot
- Output 3D data via a Gigabit Ethernet interface
- Depth reproducibility of 3 mm and 30 mm at 1 m and 7 m distances respectively
- Temperature range: 0 °C to 50 °C or up to 45 °C (depending on the housing), Enclosure rating: IP 67; light sensitivity: 0 klx ... 50 klx

Your benefits

- More than 25,000 distance and intensity values in a single shot. This means no actuator required and 3D information is readily available for stationary applications.
- Easy mounting and quick sensor replacement
- High quality 3D information tailored to your application
- Programming interface for further evaluation of 3D data on an external host
- The Visionary-T AG product offers smart data reduction

→ www.sick.com/Visionary-T

For more information, simply enter the link or scan the QR code and get direct access to technical data, CAD design models, operating instructions, software, application examples, and much more.



Detailed technical data

Features

Task	No specific application
Technology	3D, snapshot, image analysis
Working distance	0.5 m ... 7.2 m ¹⁾
Example field of view	7 m x 5.3 m ²⁾
Light source	Invisible infrared light (LED, 850 nm)
LED class	Risk group 0 in accordance with EN 62471
Grayscale measurements	✓
Factory calibrated	✓
Detection angle	69° x 56°

¹⁾ Radial distance for targets having 100% remission.

²⁾ See table for individual values.

Performance

	Visionary-T CX	Visionary-T AG
Pixel count	176 px x 144 px	
Scan/frame rate	30 fps	
On delay	< 20 s	
Response time	< 66 ms	
Integrated application	Data stream	Data stream with possibility to filter, reduce and manipulate data within the device

Interfaces

	Visionary-T CX	Visionary-T AG
Configuration software	SOPAS, API (Java, Matlab), Webserver, Telegram listing (universal use, e.g. Python, C++, C#), visualization also possible via ROS	
Ethernet	✓	
Function	Full data stream of distance, intensity, confidence values in one shot and device control	With the option to output both polar data and Cartesian data simultaneously
Data transmission rate	4.5 Mbit/s	≤ 4.5 Mbit/s
Protocol	Communication interface Gigabit Ethernet (TCP/IP)	
Digital inputs	2	
Digital outputs	4	
Optical indicators	2 status LEDs	

Mechanics/electronics

Connections	M12 8-pin Gigabit Ethernet, X-coded M12, 17-pin (voltage supply/data), system plug
Supply voltage	24 V DC ¹⁾
Power consumption	≤ 16 W Typical (without digital I/Os)
Enclosure rating	IP 67
Protection class	III
Housing color	Blue, black
Weight	1.9 kg ²⁾ 1.4 kg ³⁾ (depending on type)

¹⁾ (-30% / +20%), >1 ms latency.

²⁾ With cooling fins.

³⁾ Without cooling fins.

Dimensions (L x W x H)	162 mm x 116 mm x 104 mm ²⁾ 162 mm x 93 mm x 78 mm ³⁾ (depending on type)
Mounting	Any or can be determined by raster

¹⁾ (-30% / +20%), >1 ms latency.

²⁾ With cooling fins.

³⁾ Without cooling fins.

Ambient data

Electromagnetic compatibility (EMC)	EN 61000-6-2:2005-08, EN 61000-6-3:2007-01
Shock load	EN 60068-2-27:2009
Vibration load	EN 60068-2-6 / EN 60068-2-64
Ambient operating temperature	0 °C ... +50 °C ¹⁾ (depending on type)
Ambient storage temperature	-20 °C ... +70 °C
Light sensitivity	< 50 klx, sunlight
Depth precision	Approx. 3 mm, at 1 m range Approx. 30 mm, at 7 m range ²⁾



¹⁾ Without cooling fins only up to 45 °C.

²⁾ See table for individual values.

Ordering information

Integrated application	Ethernet	Dimensions (L x W x H)	Temperature	Type	Part number
Data stream	Full data stream of distance, intensity, confidence values in one shot and device control 4.5 Mbit/s communication interface Gigabit Ethernet (TCP/IP)	162 mm x 116 mm x 104 mm	0 °C ... +50 °C	V3S100-1AAAAAA	1067189
		162 mm x 93 mm x 78 mm	0 °C ... +45 °C	V3S100-1AABAAB	1075027
Data stream with possibility to filter, reduce and manipulate data within the device	With the option to output both polar data and Cartesian data simultaneously 4.5 Mbit/s communication interface Gigabit Ethernet (TCP/IP)	162 mm x 116 mm x 104 mm	0 °C ... +50 °C	V3S110-1AAAAAA	1075613
		162 mm x 93 mm x 78 mm	0 °C ... +45 °C	V3S110-1AABAAB	1075614


Dimensional drawings (Dimensions in mm (inch))

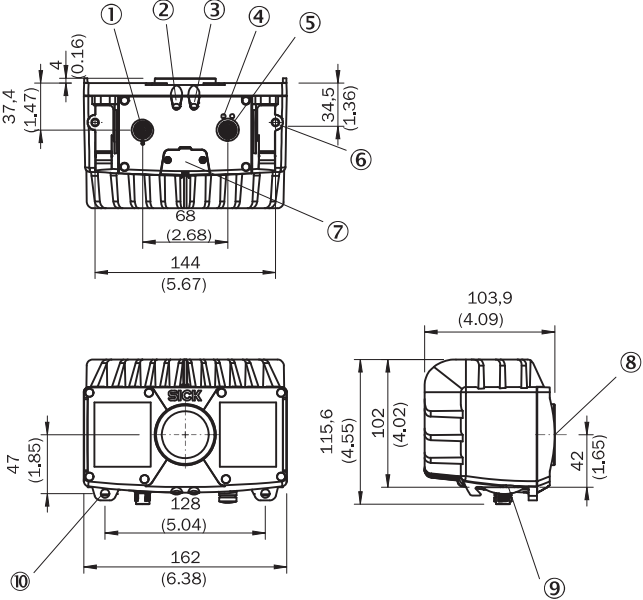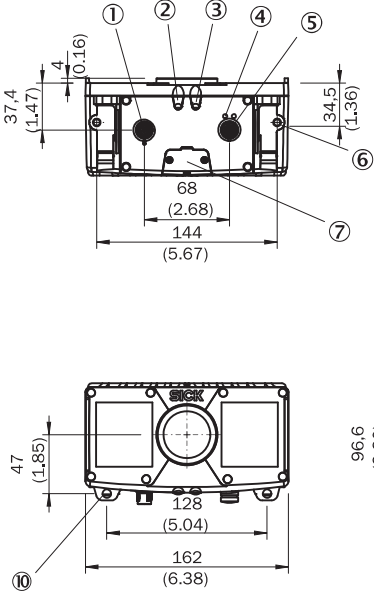


- ① Power connection / digital inputs and outputs / service
- ② Device display
- ③ Application display
- ④ Ethernet status display
- ⑤ Ethernet connection
- ⑥ M6 blind tapped holes, 7 mm deep (2 x), for mounting
- ⑦ Service interface
- ⑧ Optical axis
- ⑨ Interface bracket
- ⑩ Bracket mounting (accessories)

- ① Power connection / digital inputs and outputs / service
- ② Device display
- ③ Application display
- ④ Ethernet status display
- ⑤ Ethernet connection
- ⑥ M6 blind tapped holes, 7 mm deep (2 x), for mounting
- ⑦ Service interface
- ⑧ Optical axis
- ⑨ Interface bracket
- ⑩ Bracket mounting (accessories)

Working distance radial/absolute

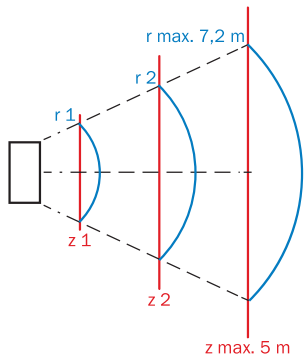

Detection zone and field of view ($\Delta x \times \Delta y$)

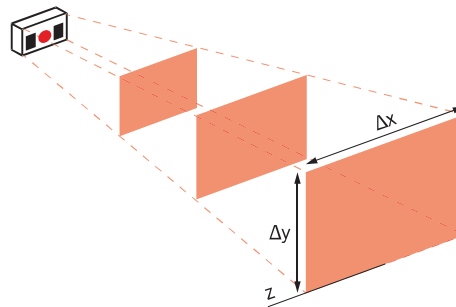

Absolute accuracy (z-axis) and repeatability at 10 % and 100 % remission and without background light for integration time of 1 ms (central detection zone)



Working distance radial (r)	Accuracy (100 % remission)	Repeatability (1 σ - 100 % remission)	Accuracy (10 % remission)	Repeatability (1 σ - 10 % remission)
0.50 m	± 15 mm	± 2 mm	± 15 mm	± 4 mm
1.00 m	± 15 mm	± 3 mm	± 15 mm	± 8 mm
2.00 m	± 15 mm	± 4 mm	± 20 mm	± 25 mm
3.00 m	± 15 mm	± 7 mm	± 35 mm	± 50 mm
4.00 m	± 20 mm	± 10 mm	± 50 mm	± 100 mm
5.00 m	± 25 mm	± 15 mm	-	-
7.00 m	± 35 mm	± 30 mm	-	-

Working distance absolute (z)	Range (Δx)	Range (Δy)
0.50 m	0.70 m	0.53 m
1.00 m	1.40 m	1.06 m
1.50 m	2.10 m	1.60 m
2.00 m	2.80 m	2.13 m
2.50 m	3.50 m	2.66 m
3.00 m	4.20 m	3.19 m
3.50 m	4.90 m	3.72 m
4.00 m	5.60 m	4.25 m
4.50 m	6.30 m	4.79 m
5.00 m	7.00 m	5.32 m

Accessories


Mounting systems

Terminal and alignment brackets

	Type	Part no.
	2x clamps, 2x screws	2077709
	Mounting set (2-part) incl. clamps and screws	2077710

Connection systems

Modules

	Brief description	Type	Part no.
	Connection device basic for connecting one sensor with 2 A fuse, 5 cable glands and RS-232 interface to sensor via M12, 17-pin female connector, all outputs available on screw/spring-loaded terminals.	CDB650-204	1064114