

**EXACT8, 8XM8, 3 POLE PRE-WIRED CABLE**

5.0m PUR/PVC 8\*0,34+2\*0,75



8-way, 3-pole  
PUR/PVC  
5.0 m

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.



[Link to Product](#)

Illustration

stay connected

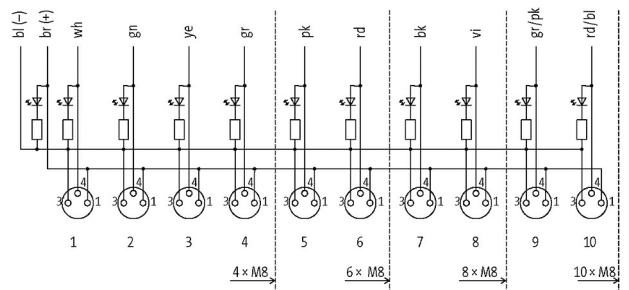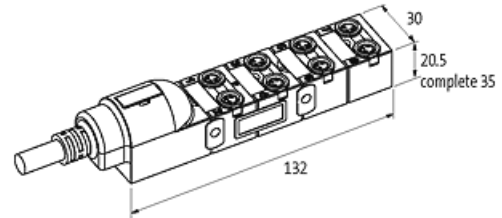

M8-Females 3-pole



for 1 signal per port

Product may differ from Image

**Approvals**



**Contact Layout**

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)
LED display	LED (green): Power / LED (yellow): (S1)

**Cables**

Cable number	357
No./diameter of wires	8× 0.34 + 2× 0.75 mm <sup>2</sup>
Wire isolation	PVC (vi, bk, rd, pk, gr, ye, gn, wh+br, bl)
C-track properties	2 Mio.
Jacket Color	gray
Material (jacket)	PUR/PVC
Outer Ø	8.6 mm ±5%
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+60 °C
Color (jacket)	gray

#### Technical Data

Operating voltage	24 V DC
Operating current per contact	max. 2 A
Total current	max. 8 A
Signal per port	1 - (31-32)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Locking of ports	Screw thread (M8×1 mm)

#### General data

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

#### Commercial data

country of origin	DE
customs tariff number	85444290
EAN	4048879054775
eClass	27143423
Packaging unit	1